



1/10

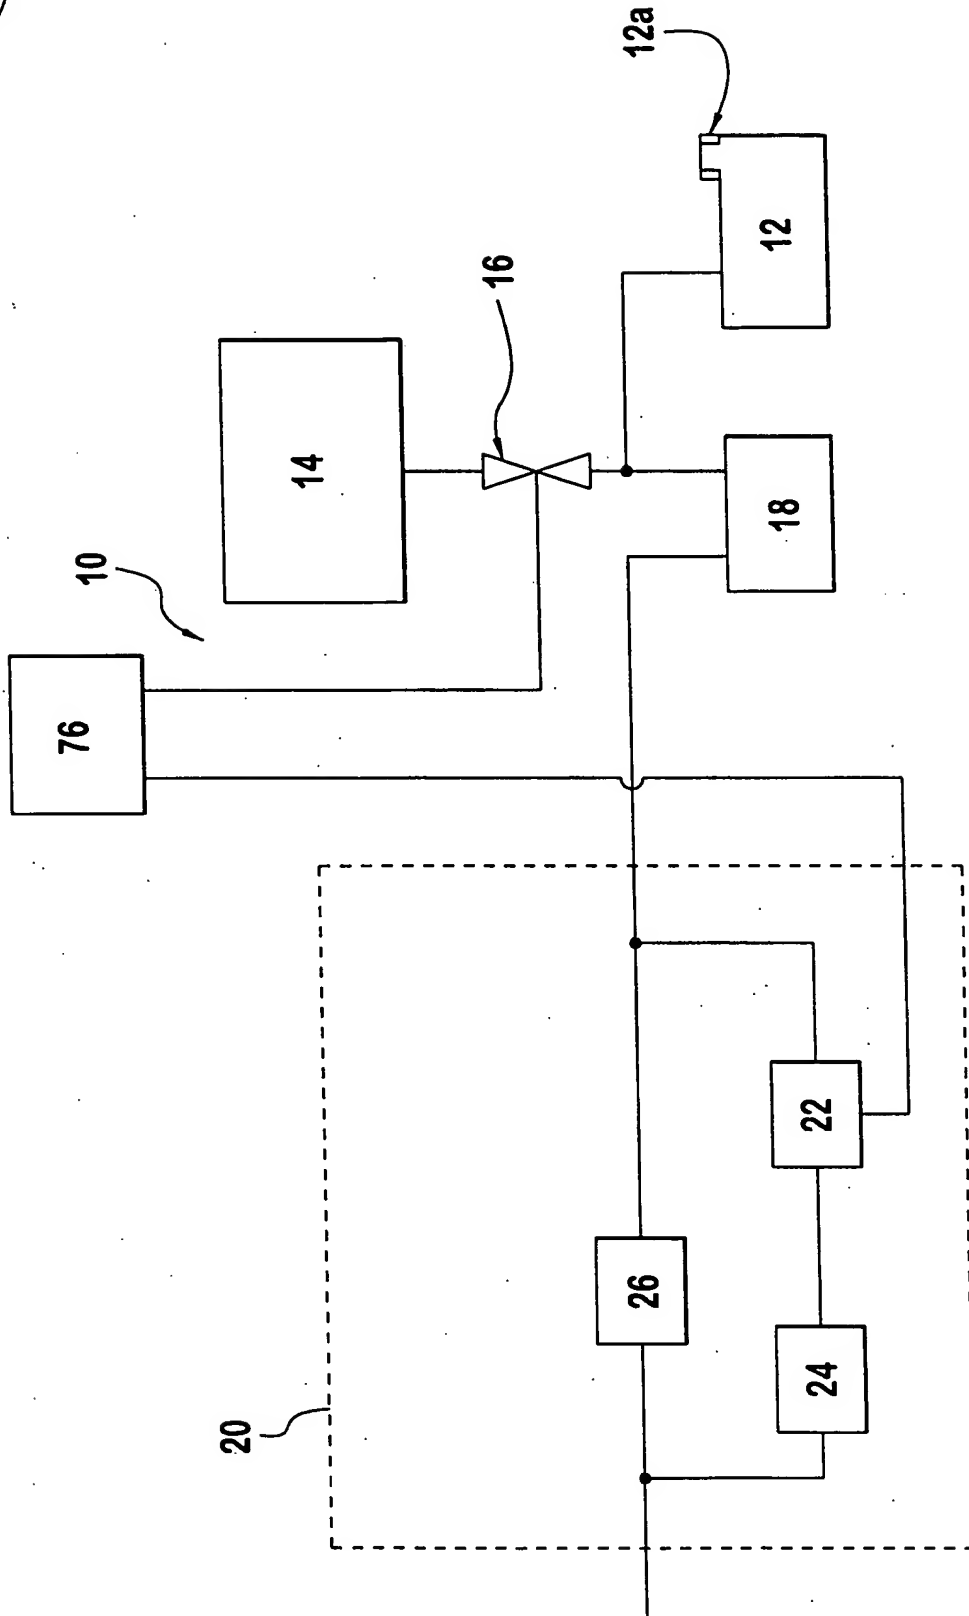


FIG. 1

2/10



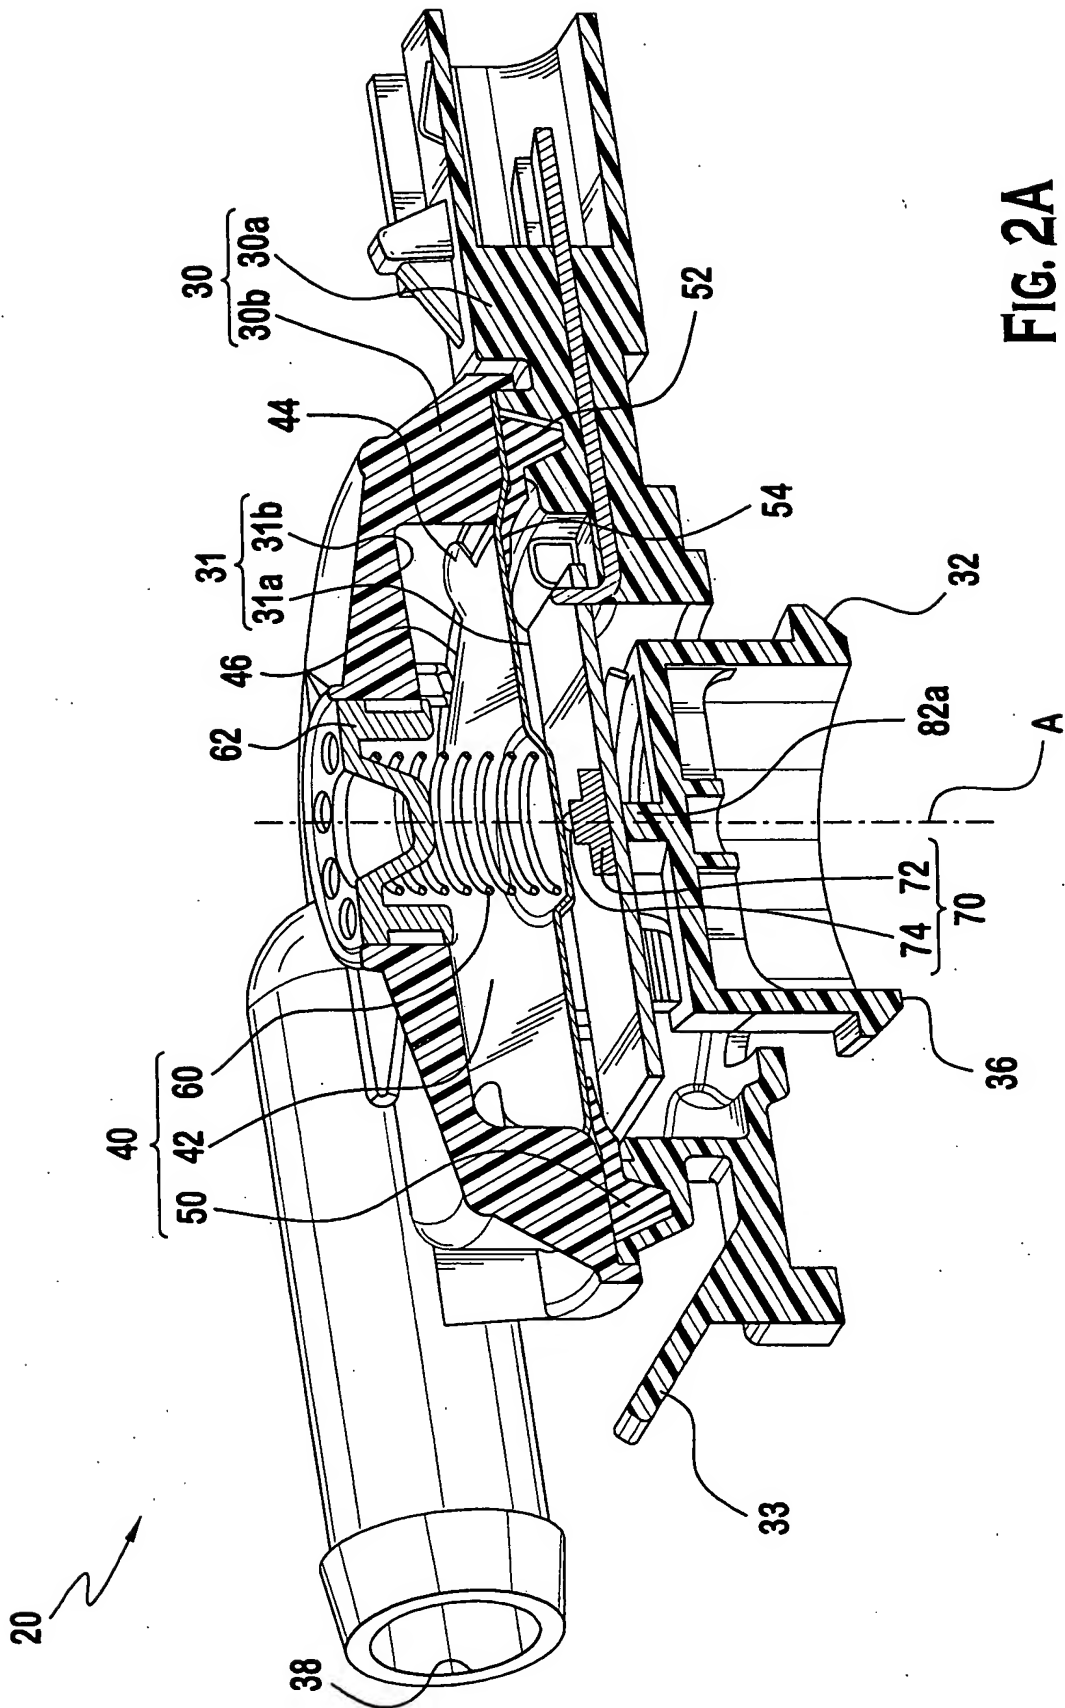



FIG. 2B

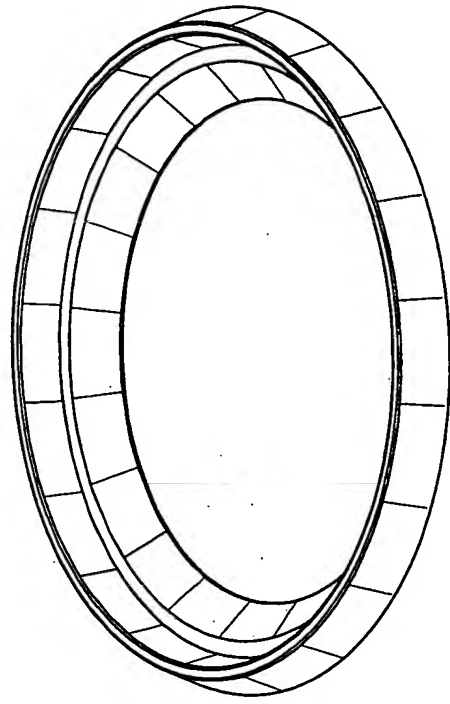

50



DETAIL B-1

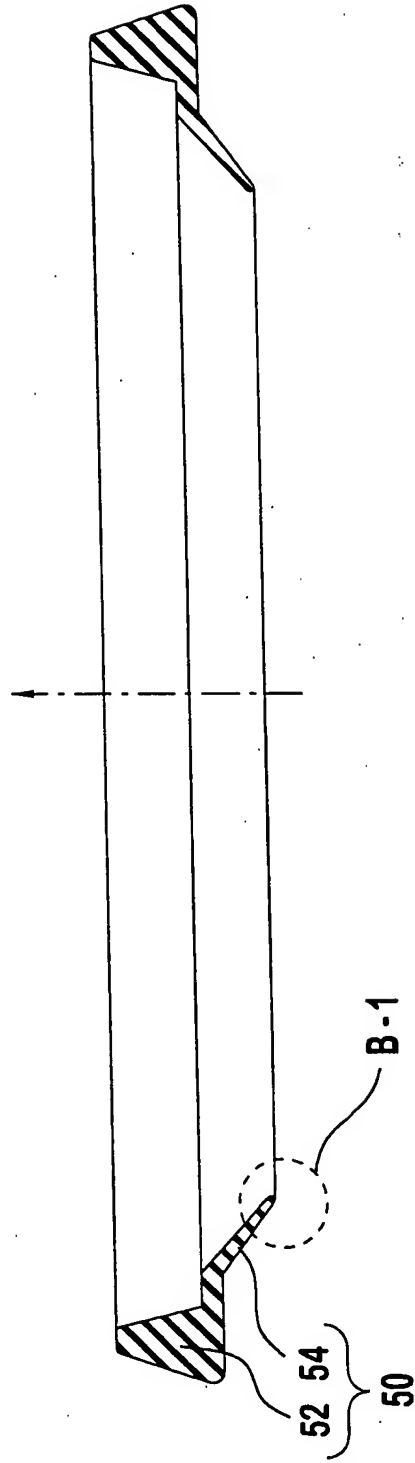

B-1

52 54
50

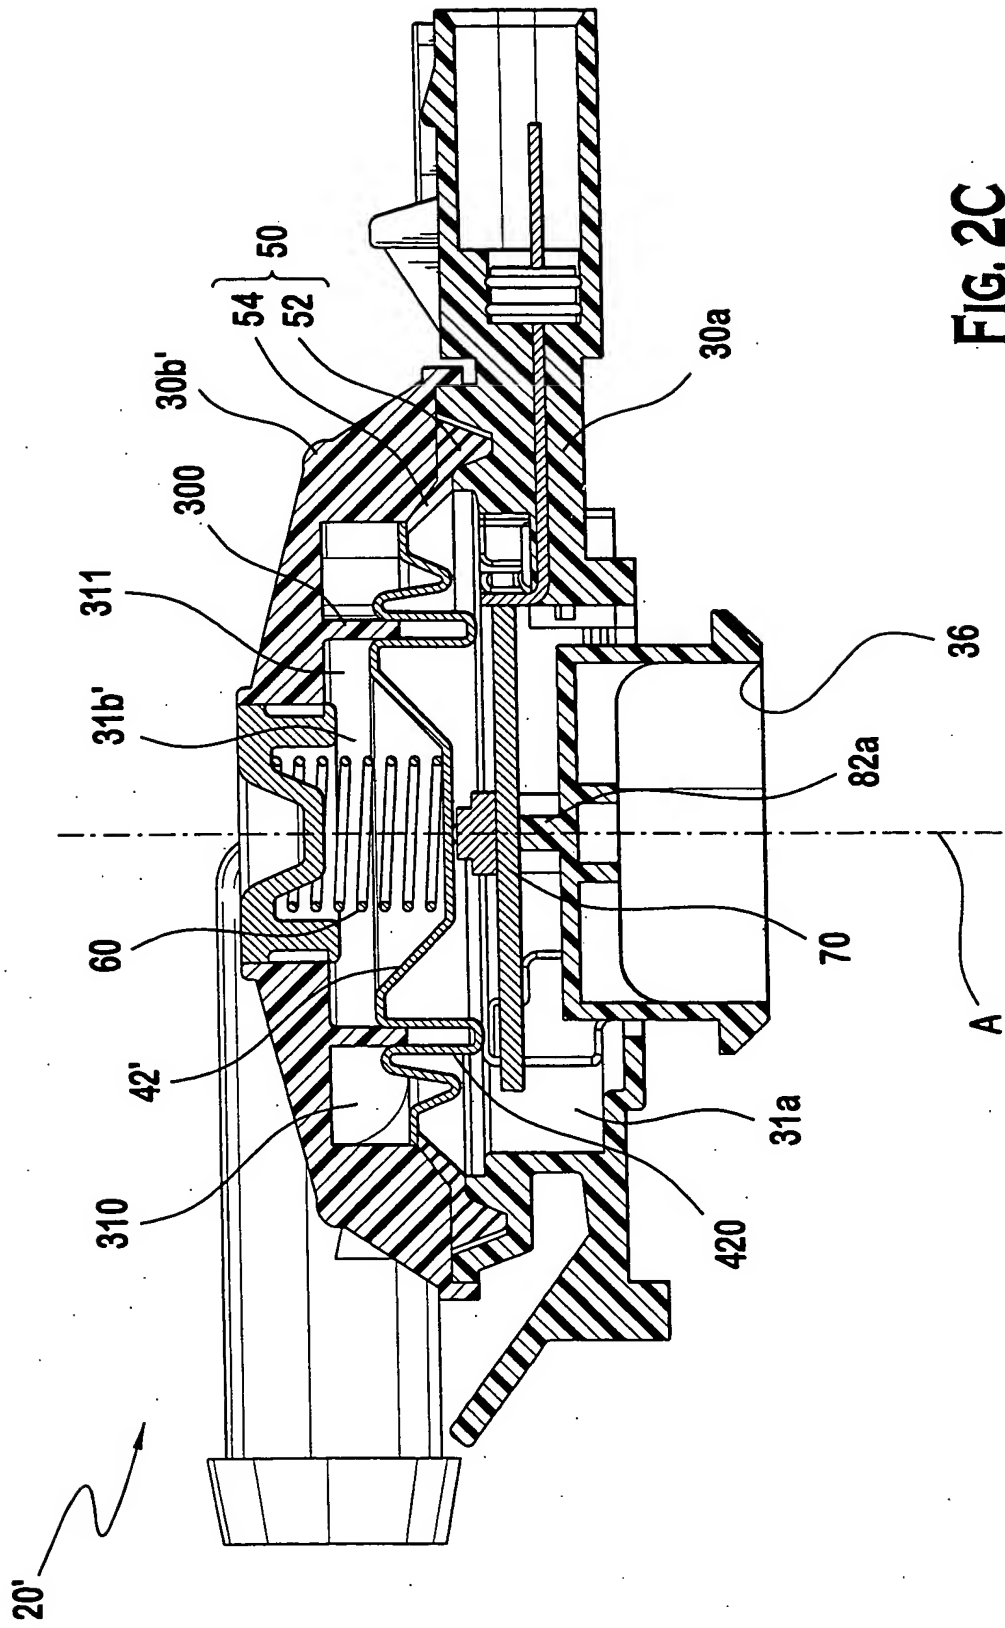


FIG. 2C

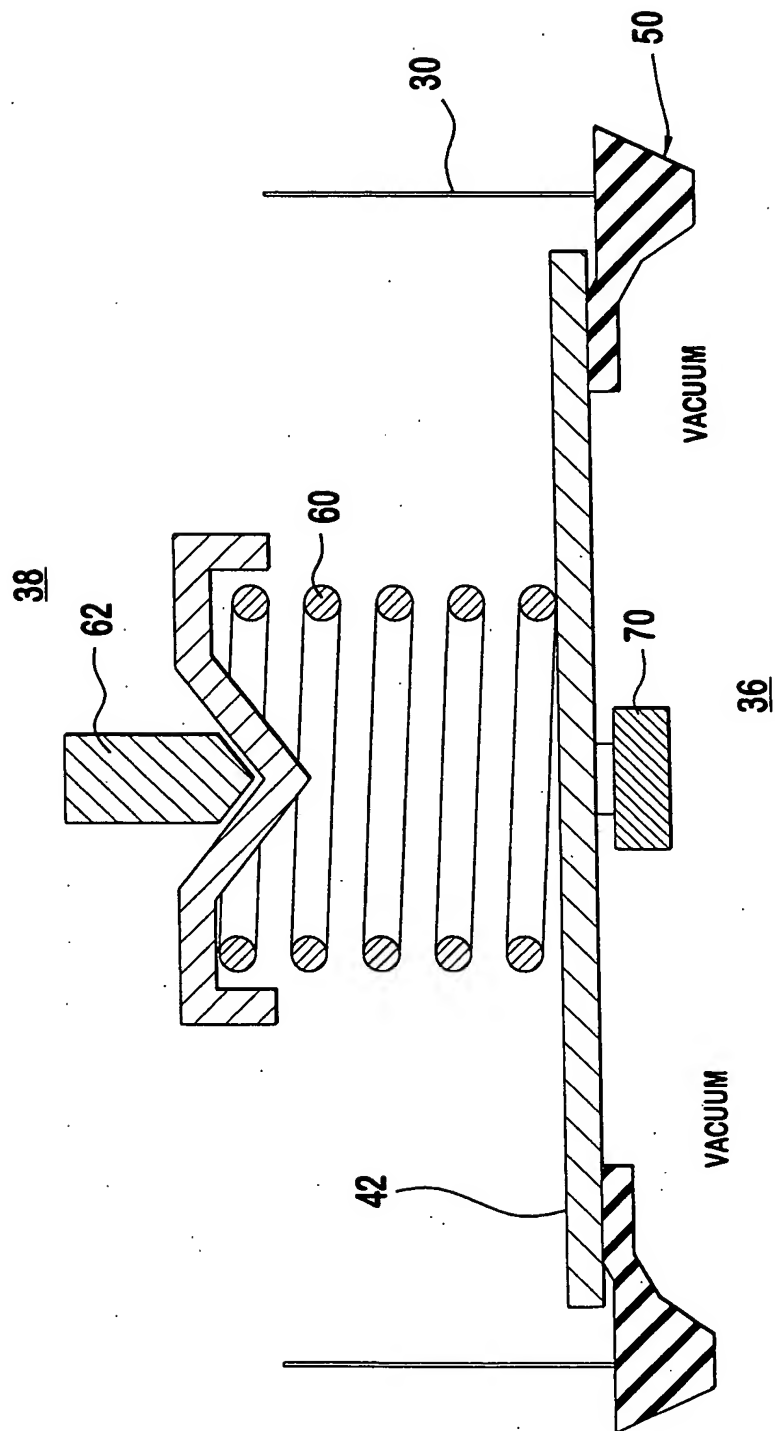


FIG. 3A

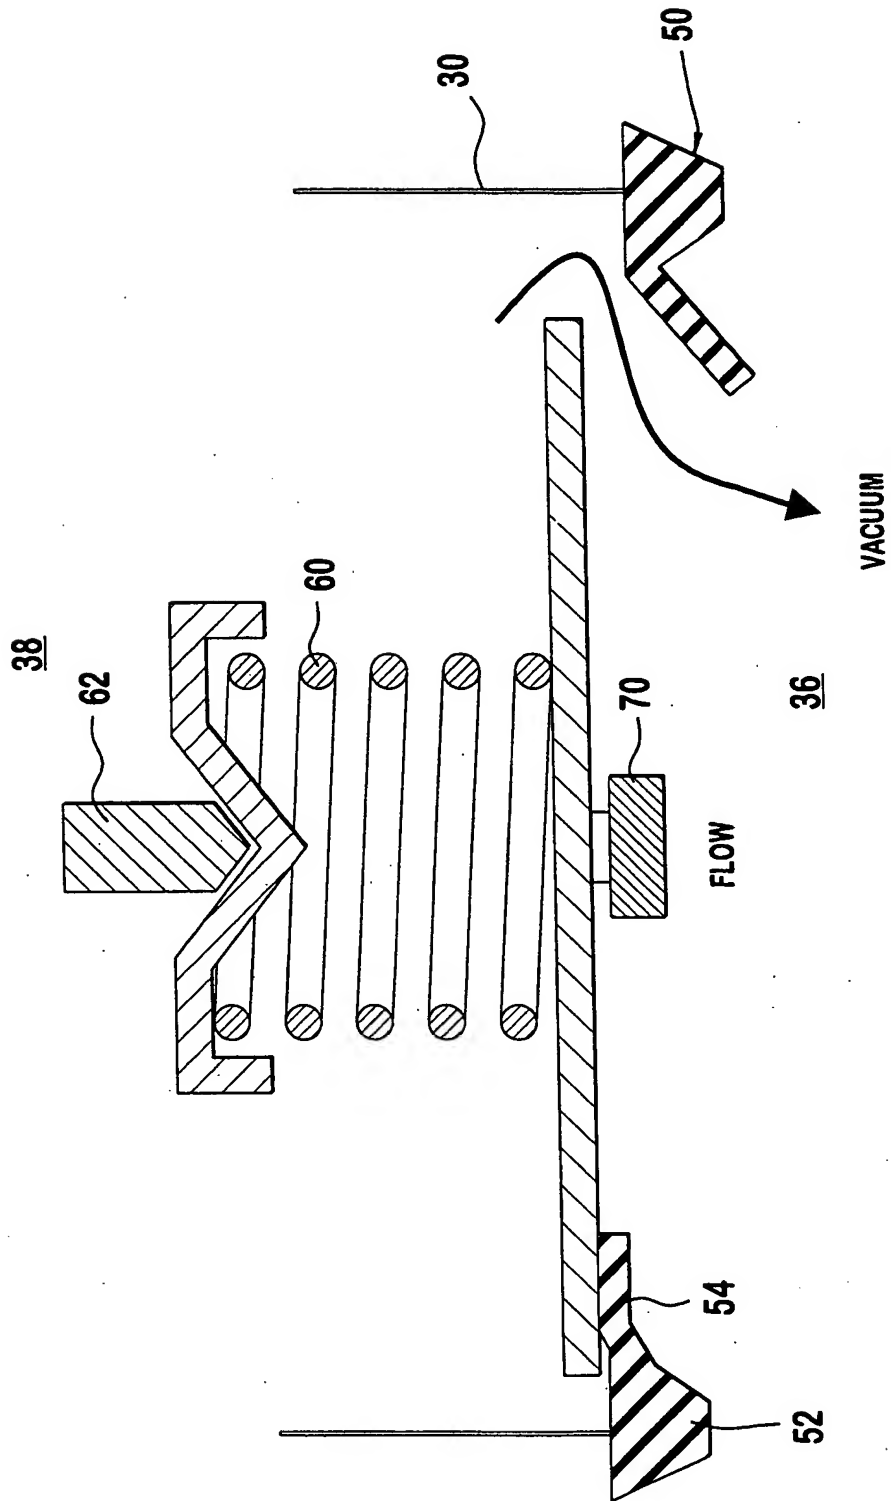


FIG. 3B

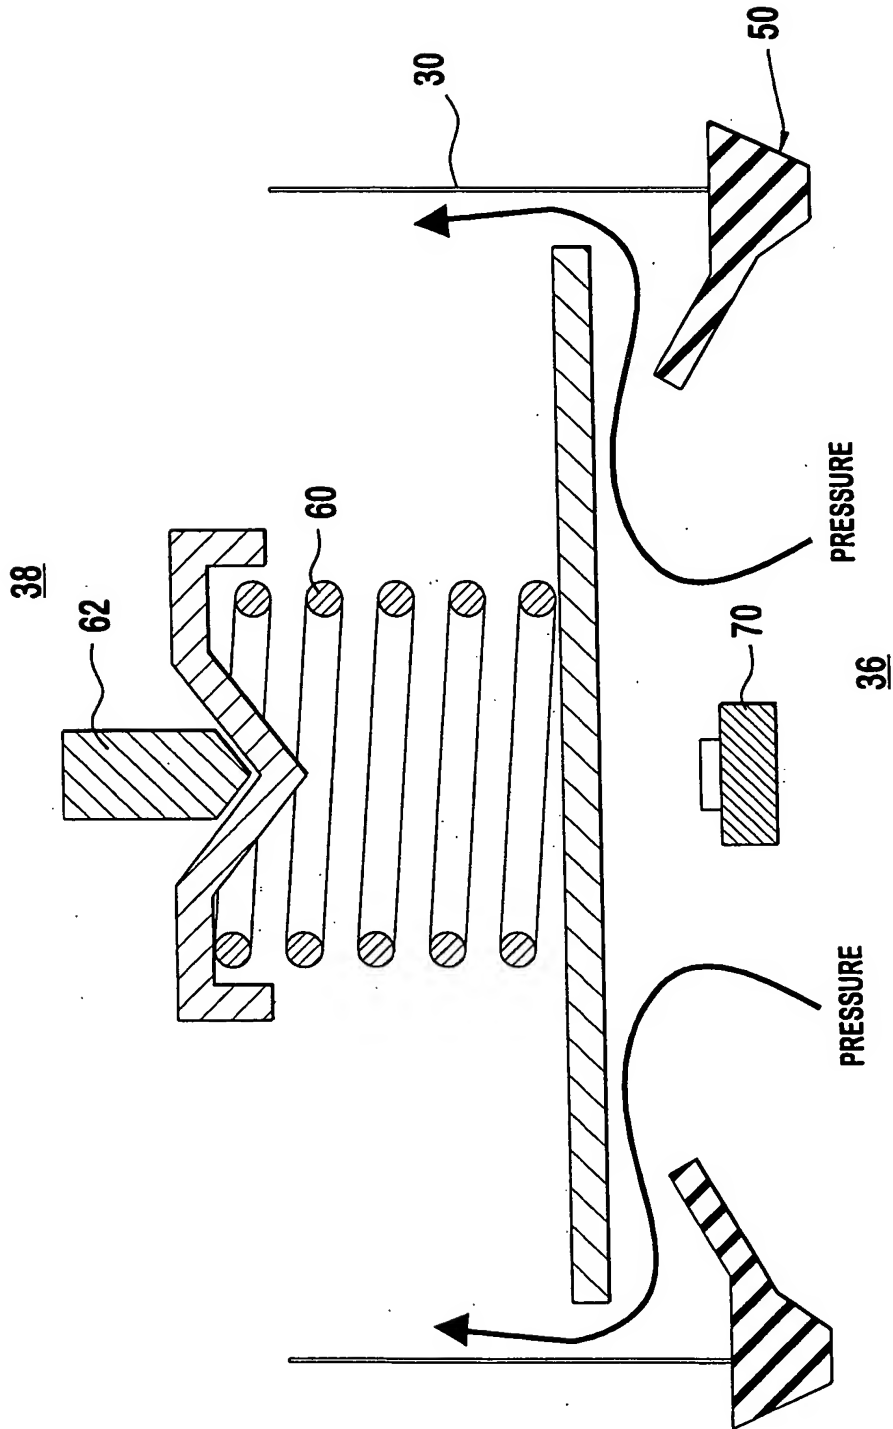


FIG. 3C


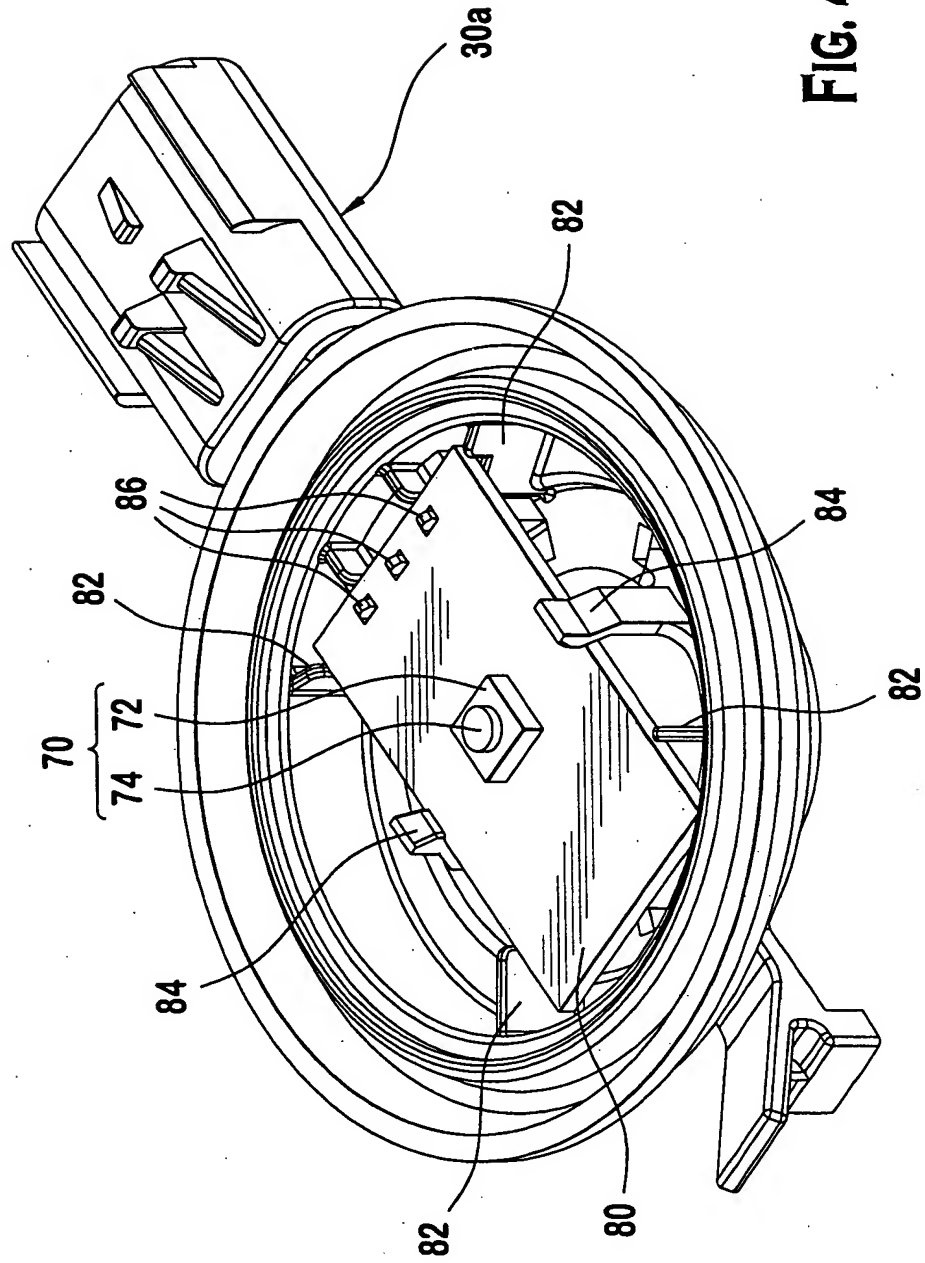


FIG. 4

9/10

FIG. 5A

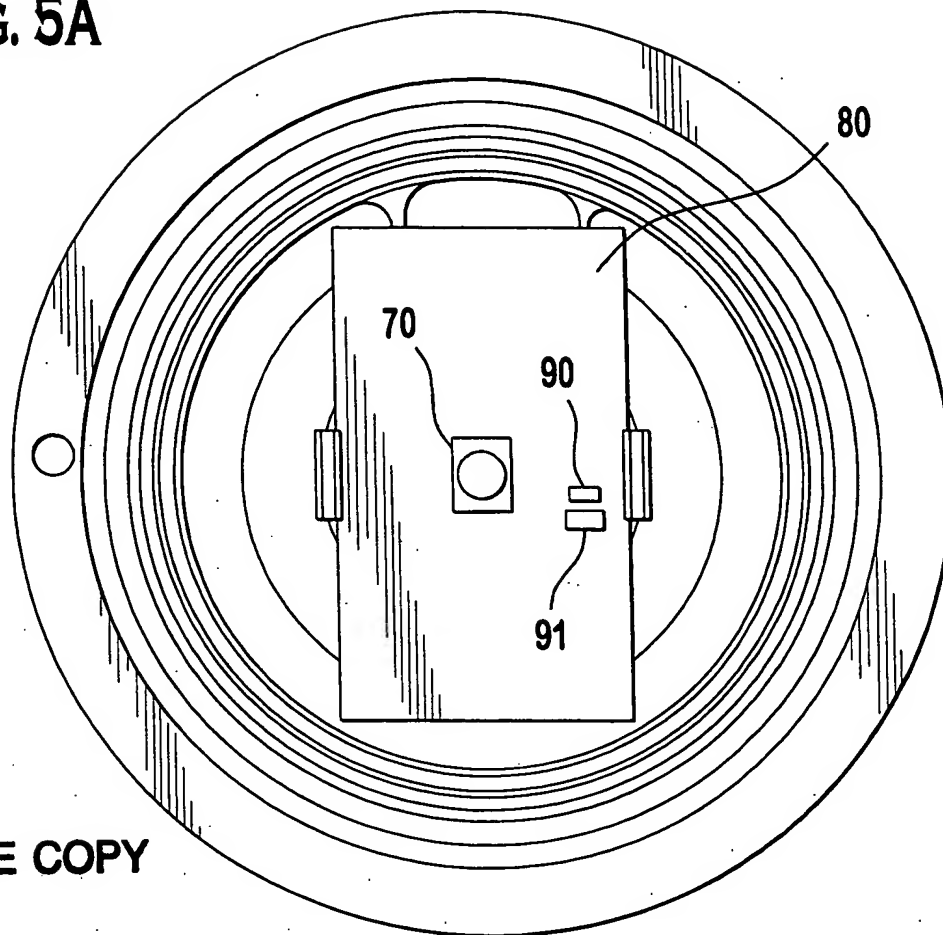

BEST AVAILABLE COPY

FIG. 5B

STEP CHANGE IN FLOW: 0-80 SLPM
AMBIENT TEMPERATURE: 20 DEGREES C
HEATING RESISTOR: 100% PWM

